
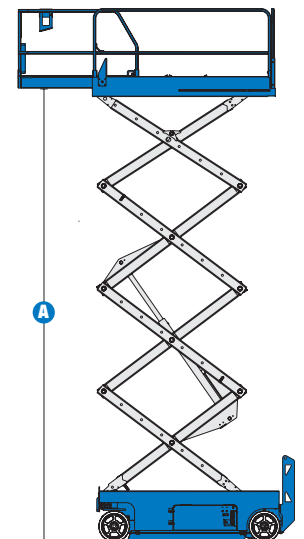



Specifications

| MODELS | GS™-2032 | | GS™-2632 | | GS™-3232 | |
|---|-------------|--------|-------------|--------|-------------|---------|
| | US | Metric | US | Metric | US | Metric |
| Working height maximum* | 26 ft | 8.10 m | 32 ft | 9.92 m | 38 ft | 11.75 m |
| A Platform height maximum | 20 ft | 6.10 m | 26 ft | 7.92 m | 32 ft | 9.75 m |
| B Platform length - outside | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m | 7 ft 5 in | 2.26 m |
| extended | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m | 10 ft 5 in | 3.18 m |
| Slide-out platform extension deck | 3 ft | .91 m | 3 ft | .91 m | 3 ft | .91 m |
| C Platform width - outside | 2 ft 8 in | .81 m | 2 ft 8 in | .81 m | 2 ft 8 in | .81 m |
| Guardrail height: fixed rails | 3 ft 3 in | .99 m | — | — | — | — |
| fold down rails (CE) | 3 ft 7 in | 1.10 m | 3 ft 7 in | 1.10 m | 3 ft 7 in | 1.10 m |
| Toeboard height | 6 in | .15 m | 6 in | .15 m | 6 in | .15 m |
| D Height - stowed | | | | | | |
| fixed rails | 6 ft 8 in | 2.03 m | — | — | — | — |
| folding guardrails (CE) | 7 ft | 2.13 m | 7 ft 5 in | 2.26 m | 8 ft | 2.43 m |
| rails folded | 5 ft 9 in | 1.75 m | 6 ft 3 in | 1.91 m | 6 ft 8 in | 2.03 m |
| E Length - stowed | 8 ft | 2.44 m | 8 ft | 2.44 m | 8 ft | 2.43 m |
| Length - extended | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m | 10 ft 11 in | 3.33 m |
| F Width | 2 ft 8 in | .81 m | 2 ft 8 in | .81 m | 2 ft 8 in | .81 m |
| G Wheelbase | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m | 6 ft 1 in | 1.85 m |
| H Ground clearance - center | 3.5 in | .09 m | 3.5 in | .09 m | 3.5 in | .09 m |
| I - with pothole guards deployed | .75 in | .02 m | .75 in | .02 m | .75 in | .02 m |



| PRODUCTIVITY | | | | | | |
|---|------------------|-----------------|------------------|-----------------|------------------|-----------------|
| Lift capacity | 800 lbs | 363 kg | 500 lbs | 227 kg | 500 lbs | 227 kg |
| Extension deck capacity | 250 lbs | 113 kg | 250 lbs | 113 kg | 250 lbs | 113 kg |
| Drive height | full height | | full height | | 22 ft | 6.71 m |
| Drive speed - stowed | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h | 2.2 mph | 3.5 km/h |
| Drive speed - raised | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h | 0.5 mph | 0.8 km/h |
| Gradeability - stowed** | 30% | | 25% | | 25% | |
| Maximum outrigger leveling: front to back | — | | — | | 3° | |
| side to side | — | | — | | 5° | |
| Turning radius - inside | zero | zero | zero | zero | zero | zero |
| Turning radius - outside | 7 ft | 2.13 m | 7 ft | 2.13 m | 7 ft | 2.13 m |
| Raise / lower speed | 30 / 34 sec | 30 / 34 sec | 30 / 40 sec | 30 / 40 sec | 57 / 40 sec | 57 / 40 sec |
| Controls | proportional | | proportional | | proportional | |
| Drive | dual front wheel | | dual front wheel | | dual front wheel | |
| Multiple disc brakes | dual rear wheel | | dual rear wheel | | dual rear wheel | |
| Tires - solid non-marking | 15 x 5 x 11 in | 38 x 13 x 28 cm | 15 x 5 x 11 in | 38 x 13 x 28 cm | 15 x 5 x 11 in | 38 x 13 x 28 cm |

| POWER | | | | | | |
|---------------------------|---------------------------------------|--------|---------------------------------------|--------|---------------------------------------|--------|
| Power source | 24 V DC (four 6V 225 Ah batteries) | | 24 V DC (four 6V 225 Ah batteries) | | 24 V DC (four 6V 225 Ah batteries) | |
| Hydraulic system capacity | 3.75 gal | 14.2 L | 3.75 gal | 14.2 L | 3.75 gal | 14.2 L |

| WEIGHT*** | | | | | | |
|-----------|-----------|----------|-----------|----------|-----------|----------|
| ANSI, CSA | 3,574 lbs | 1,621 kg | 4,413 lbs | 2,002 kg | 5,185 lbs | 2,352 kg |
| CE, AUS | 4,024 lbs | 1,825 kg | 4,313 lbs | 1,956 kg | 5,185 lbs | 2,352 kg |

STANDARDS COMPLIANCE ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.
 ** Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.
 *** Weight will vary depending on options and/or country standards.

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2032

- 26 ft (8.10 m) working height
- Up to 800 lb (363 kg) lift capacity

GS™-2632

- 32 ft (9.92 m) working height
- Up to 500 lb (227 kg) lift capacity

GS™-3232

- 38 ft (11.75 m) working height
- Up to 500 lb (227 kg) lift capacity

PRODUCTIVITY

- 89 x 32 in (2.26 x .81 m) steel platform
- 36 in (.91 m) extension deck
- Fixed rail with chain entry gate (standard GS-2032)
- Folding rails with half-height swing gate (standard on all CE, GS-2632, GS-3232)
- Automatic leveling outriggers (GS-3232 only)
- Dual front wheel drive
- Automatic battery charger
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Manual platform lowering valve
- Emergency stop at both platform and ground controls
- Multiple disc brakes
- Brake release
- Solid non-marking tires
- Pothole guards
- Tilt level sensor with audible alarm
- Descent alarm
- Electronic horn
- Hour meter

POWER

- 24 V DC (four 6 V 225 Ah batteries)

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Folding rails with half-height swing gate (GS-2032)
- Platform swing gate, half-height (GS-2032)
- Air line to platform
- Dual flashing beacons
- Motion package
- Platform work lights
- Automotive horn
- Laser locator (GS-3232)

POWER

- Power Inverter
- Maintenance-free batteries
- EE rating



Distributed By:



Kerm Co Limited

P.O. Box 161, Lewes BN7 9ES

Tel/Fax: 01825 724489

Mobile: 07790 295081

Email: info@kermco.co.uk

www.kermco.co.uk