

PKS 1070 series

Self-propelled Aerial Platforms

PKS 1070 series

New rotating frame with lateral and frontal overhang and automatic rotation by hydraulic control. The Super Compact model is loaded on a van with high roof.

The hydraulic grader is a very important and suggested accessory to allow the platform to be levelled up to a 20 cm difference in height.

EN 280 CE CERTIFICATED, FOR INTERNAL USE WITHOUT WIND.

TECHNICAL DESCRIPTION

Speed: From 0 to 25 m/mins with movement at height

Controls: Cage supplied with all controls, check control, timer, key, lift/lowering, CCS and ICS safety systems, Electronic control of platform slope with automatic block, Acoustical movement device

Batteries: 2 130Ah 12Vdc batteries with reinforced plates

Battery charger: Portable, 220V, 50Hz, 15A, 24Vdc

Lift: Hydraulic system with motor 2KW, safety valve and emergency lowering system

Steering: Hydraulic system with motor 500W



Tower: Made of anodised aluminium, telescopic system with BACKLASH RECOVERY, FLEIER transmission chains, PLUNGING hydraulic cylinder, 12 sliding rollers for each tower with VRS


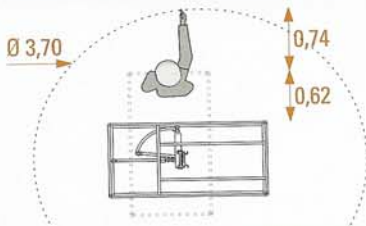





Turning circle: 2.5 mt.








Slope surmountable: With closed machine, frontal 15%, lateral 5%

Traction: 2 700W engines 24Vdc operated by 1 electronic circuit card with MOSFET technology and computerised energy recovery



		PKS 1070	PKS 1070 Z
	A	1,67 mt	1,67 mt
	H	10 mt	10 mt
	 Kg	1648	1770

	Cod. C/SUPGIR	Cestello Girevole <i>Rotating frame</i>	
		 128 kg	
		 200 Kg	 200 Kg
			

	Cod. C/SUPPKS10	Cestello Fisso <i>Fixed frame</i>	
		 118 kg	
		 200 Kg	 200 Kg
			



Nuovo cestello girevole con comando idraulico.
New rotating frame with hydraulic operation.



Super Compatta
si carica su un furgone a tetto alto
The Super Compact model is loaded on a van with high roof.

Il **Livellatore Idraulico** è un accessorio molto importante e consigliato che permette alla Piattaforma di livellarsi fino a 20 cm di dislivello.

The **hydraulic grader** is a very important and suggested accessory to allow the platform to be levelled up to a 20 cm difference in height.



Rotazione automatica con comando idraulico.
Automatic rotation by hydraulic control.

