

# Micro-Scissor Lift

**UpRight**  
POWERED ACCESS



- 7.8m max. working height
- Compact dimensions with tight turning radius
- Fully proportional controls
- Roll - out deck extension
- Non-marking tyres

**MX19**

# MX19 micro-scissor lift specifications

## MX19 MICRO-SCISSOR LIFT

max. working height <b>A</b>	7.8m
max. platform height <b>B</b>	5.8m
max. drive height	5.8m
platform capacity (SWL)	227kg
platform size (inside - with deck extended)	0.72m x 2.54m
stowed height <b>C</b>	2.13m
with guardrails lowered	1.6m
stowed length <b>D</b>	1.75m
with steps removed	1.6m
width <b>E</b>	0.76m
gross weight	1,460kg
max. drive speed	3.7km/h
with platform raised	1km/h
gradeability	14°/ 25%
inside turning radius	0.15m
ground clearance	95mm
lift speed - raise/lower	19/18 seconds
drive system	dual front wheel hydraulic motors
tyres	305mm dia. solid rubber, non-marking
battery charger	25 amp 90V - 240V automatic with ammeter
parking brake	2 wheel, spring-applied hydraulic release and manual release
control system	smooth, one-hand proportional controls
power source	24V 4hp DC electric motor 4 x 6V 220 Ah batteries

Specifications subject to change without notice. Photos and diagrams in this brochure are for promotional purposes only. Refer to appropriate UpRight operators manual for detailed instructions on the proper use and maintenance.



Compact dimensions and tight turning radius provides excellent manoeuvrability



**Kerm Co Limited**  
 P.O. Box 161, Lewes BN7 9ES  
 Tel/Fax: 01825 724489  
 Mobile: 07790 295081  
 Email: info@kermco.co.uk  
[www.kermco.co.uk](http://www.kermco.co.uk)



Bp1. MX19 10/06

## standard features

- Roll-out deck extension with foot pedal release
- Folding guardrails
- Side forklift pockets
- Non-marking tyres
- Swing-out service modules
- Tilt alarm, descent alarm
- Selectable motion/alarm
- Proportional controls
- Lift-up rear guardrail to ease loading
- Ground view grates in deck extension
- AC power cable to platform
- Hour meter
- Horn, push button on controller
- 1 year parts and labour warranty
- 5 year structural warranty

## options

- Platform gate interlock
- Special paint colours
- Environmental green oil

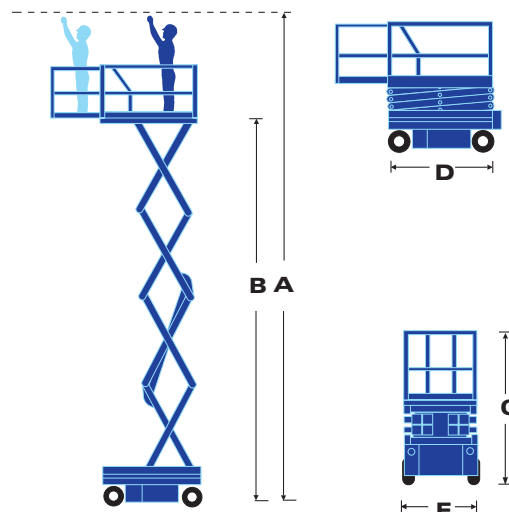

**CE** This product is available with the CE mark confirming compliance with all relevant European Machinery Directives

manufactured by  
**UpRight**  
 POWERED ACCESS